



**NAME:**


SLALOM

**DESCRIPTION:**

Modular separation system composed of sheet panels or PVC, insertable inside uprights by leaks.

**APPLICATION:**

- Freestanding: Slalom system – Insert the panel from top to bottom in the joint of the upright.

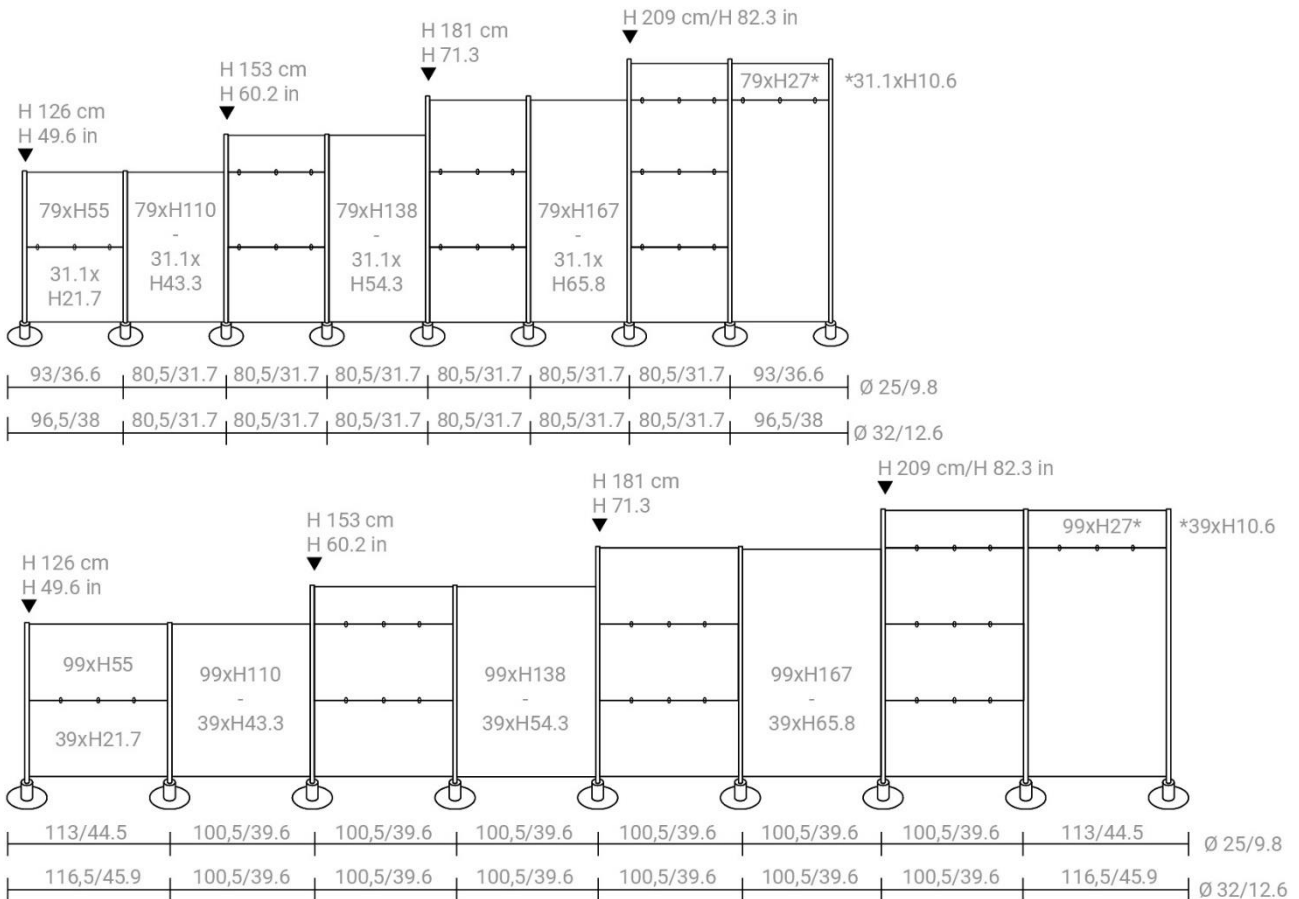

**DIMENSIONS:**

- Slalom system : L Wheelbase **80,5 | 100,5** x H **126 | 153 | 181 | 209** cm  
: L Wheelbase **31.7 | 39.6** x H **49.6 | 60.2 | 71.3 | 82.3** in
- Panels in PVC : L **79 | 99** x H **27 | 55 | 110 | 139 | 167** cm x THK **0,7** mm  
: L **31.1 | 39** x H **10.6 | 21.6 | 43.3 | 54.7 | 65.7** in x THK **0.03** in
- Micro-perforated sheet panel : L **79 | 99** x H **27 | 55** cm x THK **0,5** mm  
: L **31.1 | 39** x H **10.6 | 21.7**cm x THK **0.02** in

**COMPOSITION:**

- Support element composed of :
  - Disc base: Ø 25 | 32 cm x THK 6 mm (Ø 9.8 | 12.5 x THK 0.23 in) in metal varnished with epoxy powders, in color embossed grey and black; completed of felt for floor protection.
  - Fixing cylinder upright: Ø 7,5 x H 12 cm (Ø 2.9 x H 4.7 in ) in metal varnished with epoxy powders, in color embossed grey.
  - Tubular profile extruded aluminum alloy: in natural color or black, diameter Ø 3,2 x H 116,8 | 144,6 | 172,4 | 200,2 cm (Ø 1,2 x H 45.9 | 144,6 | 67.8 | 78.8 in) with extremities threaded M6 to be fastened to the base and to the finishing top element.
  - Superior finishing elements: Ø external 3,5 x H 1,7 cm (1.3 x H 0.6 in) in metal varnished with epoxy powders, in color embossed grey.
  - Lower spacer: in galvanised steel, Ø 4,2 cm x H 3 mm (1.6 x H 1.2 in)
- Spacer elements:
  - Oval spacer elements: 2,8 x 4,5 cm (1.1 x 1.8 in) printed in ABS semi transparent
- More informations:
  - Base available also in the version Wall start base: 25 | 32 x 16 | 19 cm x THK 6 mm (9.8 | 12.5 x 6.2 | 7.4 x THK 0.23 in) in varnished with epoxy powders, in color embossed grey, completed of felt for floor protection
- Panels:
  - Micro-perforated sheet panel: flexible at 20°, holes diameter Ø 2 mm, dimension L 79 | 99 x H 27 | 55 cm x THK 0,5 mm (diameter Ø 0.07 in, dimension L 31.1 | 38.9 x H 10.62 | 21.6 x THK 0.01 in) in metal varnished with epoxy powders, in color embossed grey.
  - PVC self-extinguishing: flexible at 360°, dimension L 79 | 99 x H 27 | 55 | 110 | 139 | 167 cm x THK 0,7 mm (L 31.1 | 38.9 x H 10.62 | 21.6 | 43.3 | 54.7 | 65.7 cm x THK 0.02 mm), in finishing transparent , opaline, white, grey, with white striped textures, multicolor, mix colored, mix neutral, graphical black, graphical brown and with textures dots.

NOTE: For PVC panels above H55 cm, ONLY opaline and gray colors are available.

**CERTIFICATION:**

• **TEST CATAS:**

The product meets the following requirements:


- Stability without elements hooked according to rules EN 1023-3/00 par. 6.1
- General requirements of safety according to rules EN 1023-2/00 par. 3

**COLORS:**


PVC basic | basic | basique | Basic | basico



PVC stampa serigrafica | screen print | sérigraphié | Siebdruck | en serigrafía

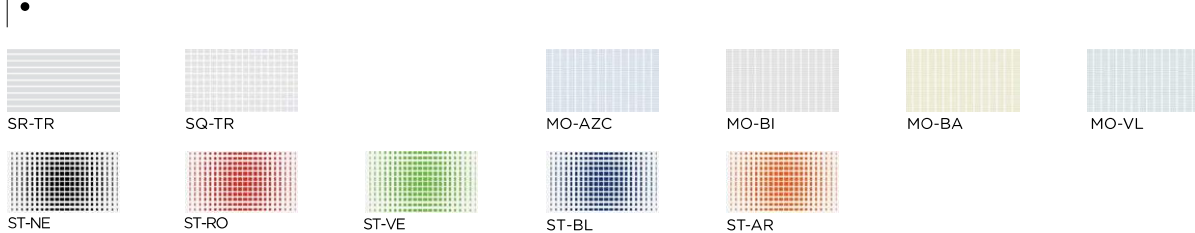

PVC stampa digitale | digital print | impression digitale | Digitaldruck | impresión digital

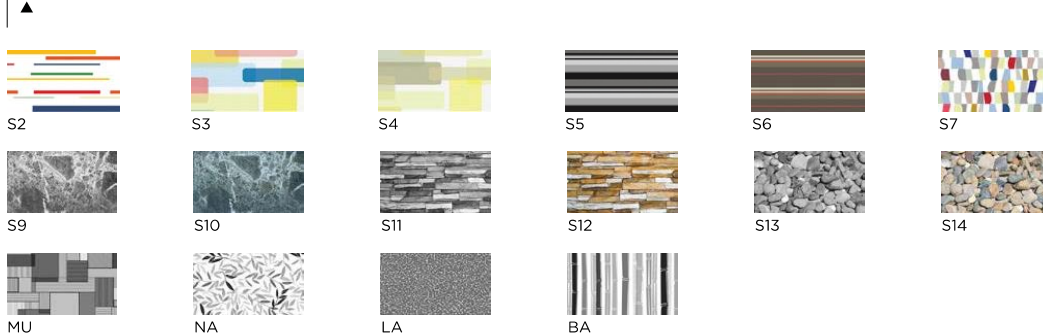

Metallo microforato | microperforated metal | métal perforé | perforiertes Metall | metal perforado

