



**NAME:**

OASIS


**DESCRIPTION:**

Sound-absorbing and anti-reverberant freestanding element.

Composed of a frame with metal uprights topped with rigid felt leaves, and tables with arrangements for charging electronic equipment

**APPLICATION:**


- Freestanding

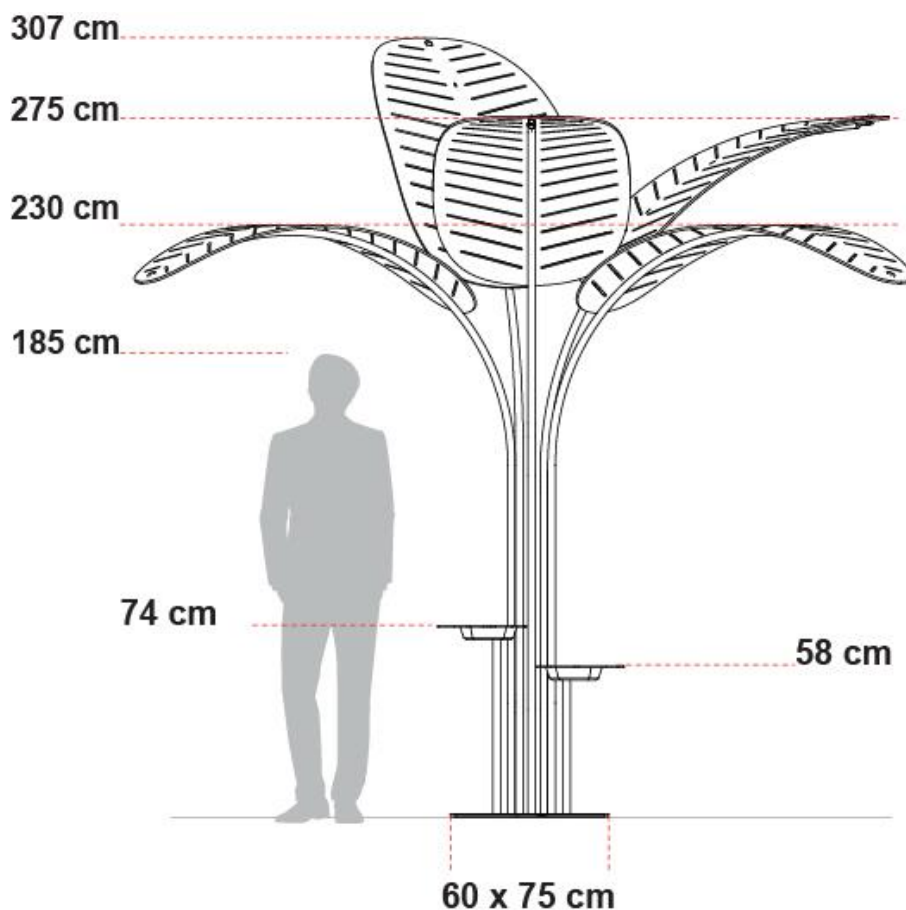

## **XL VERSION**

### **DIMENSIONS:**

- Base: With tables: **74,6 x 59,8 cm x THK 8 mm**  
**29.4 x 23.5 in x THK 0.3 in**  
Without tables: **Ø 60 cm x THK 8 mm**  
**Ø 23.6 in x THK 0.3 in**
- Uprights: **Ø 3 x H 230 | 275 | 307 cm**  
**Ø 1.2 x H 90.5 | 108.3 | 120.8 in**
- Tables: Base: **Ø 3 x H 57,8 | 73,8 cm**  
**Ø 1.2 x H 22.7 | 29.1 in**  
Shelf: **34,9 x 30,6 cm x THK 0,6 cm**  
**13.7 x 12 x THK 0,2 in**
- Leaves: **150 x 77,8 cm x THK 1 cm**  
**59.1 x 30.6 x THK 0.4 in**

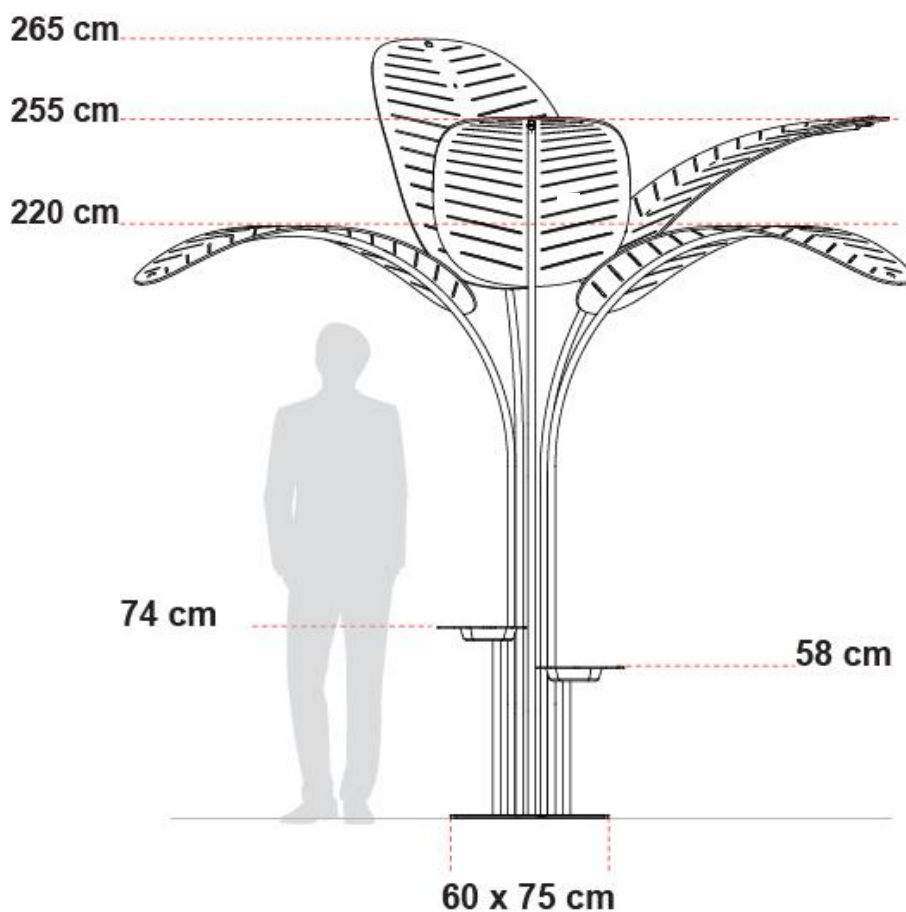

## SMALL VERSION

### DIMENSIONS:

- Base: With tables: **74,6 x 59,8 cm x THK 8 mm**  
**29.4 x 23.5 in x THK 0.3 in**  
Without tables: **Ø 60 cm x THK 8 mm**  
**Ø 23.6 in x THK 0.3 in**
- Uprights: **Ø 3 x H 220 | 255 | 265 cm**  
**Ø 1.2 x H 86.6 | 100.4 | 104.3 in**
- Tables: Base: **Ø 3 x H 57,8 | 73,8 cm**  
**Ø 1.2 x H 22.7 | 29.1 in**  
Shelf: **34,9 x 30,6 cm x THK 0,6 cm**  
**13.7 x 12 x THK 0,2 in**
- Leaves: **150 x 77,8 cm x THK 1 cm**  
**59.1 x 30.6 x THK 0.4 in**

**COMPOSITION:**

- Support element composed of:
  - Base: **74,6 x 59,8 cm x THK 8 mm (29.4 x 23.55 in x THK 8 mm)** in steel varnished with epoxy powders, completed of felt for floor protection.
  - Supporting curved uprights: S: **Ø 30 x H 200 | 255 | 265 cm** - XL: **Ø 30 x H 210 | 275 | 307 cm** (S: **Ø 11.8 x H 78.75 | 100.4 | 104.3 in** - XL: **Ø 11.8 x H 82.67 | 108.25 | 120.85 in**) prepared for fixing to the base, in steel varnished with epoxy powders.
  - Tables: uprights (**Ø 30 x H 57,8 | 73,8 cm** - **Ø 11.8 x H 22.75 | 29.05 in**) and shelves (**34,9 x 30,6 cm x THK 3,5 mm** - **13.75 x 12.05 in x THK 3,5 mm**) prepared for fixing to the base, painted steel in oven with epoxy powders.
  - Elements of support panels:
    - Pins for hooking leaves: back (**Ø 2 x H 1,8 cm** - **Ø 0.79 x H 0.71 in**), front (**Ø 2 x L 6 cm** - **Ø 0.79 x L 2.35 in**) printed in ABS
  - Other informations:
    - OASIS base also available in the version without tables: **Ø 60 cm x THK 8 mm (Ø 23.6 in x THK 8 mm)** in steel varnished with epoxy powders, completed of felt for floor protection.
  - Hard felt leaves:
    - **PETfelt** - 100% PET

**COLOR DIFFERENCES:**

Slight differences between dyeing lots are considered normal.

**RECYCLABILITY:**

- **PETfelt**: Material made from recycled plastic bottles, recyclable product respecting the environment.

**MAINTENANCE:**

Regularly and carefully use the vacuum cleaner with a smooth spout, or use soft bristle brushes or professional pads for padding and upholstery



**CERTIFICATION:**

• **FIRE REACTION CLASS UE:**

B-s2, d0 - *OPTIONAL*



• **FIRE REACTION CLASS USA:**

Class A - ASTM E 84-18 - *OPTIONAL*



• **SOUND ABSORPTION REPORT:**

UNI EN ISO 354: 2003


UNI EN ISO 11654: 1998



Sample description: HARDfelt  
Mounting Type: Mounting A

Sample area: 11.13 m<sup>2</sup>  
Reverberation room volume: 161.3 m<sup>3</sup>

f [Hz]	$\alpha_s$ [-]
Frequency	Acoustic absorption coefficient values
100	-0.04
125	0.03
160	0.03
200	0.02
250	0.02
315	0.03
400	0.07
500	0.13
630	0.17
800	0.25
1000	0.39
1250	0.47
1600	0.55
2000	0.60
2500	0.68
3150	0.69
4000	0.72
5000	0.78

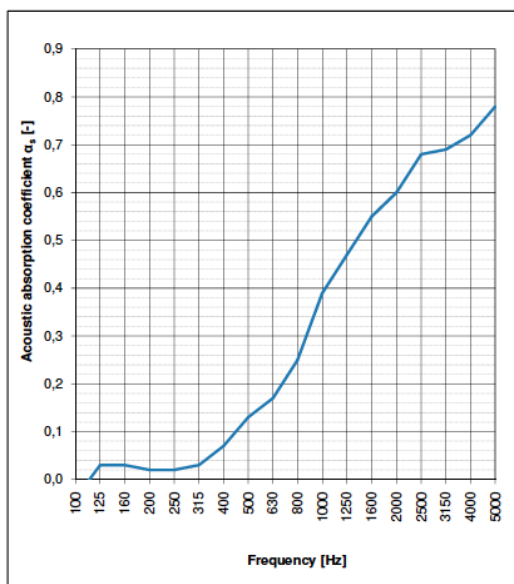

Evaluation based on laboratory measurement results by means of a technical method.

**LEAF COLORS:** White, Grey, Dark grey and Black. Other colors are available on request

**STRUCTURE COLOR:** painted with **RAL** colors on request